

RIEGL miniVUX[®]-2UAV

- **100 kHz / 200 kHz Laser PRR selectable**
- **measurement rate up to 200,000 measurements/sec**
- **scan speed up to 100 scans/sec**
- **very compact & lightweight (1.55 kg / 3.4 lbs)**
- **360° field-of-view**
- **robust aluminum housing, ready to be mounted on multi-rotor, rotary-wing, and fixed-wing UAVs**
- **makes use of RIEGL's unique echo signal digitization and online waveform processing**
- **multiple target capability – up to 5 target echoes per laser shot**
- **mechanical and electrical interface for IMU mounting**
- **exceptionally well suited to measure in snowy and icy terrains**
- **user-friendly, application- and installation-oriented solutions for integration**

The *RIEGL* miniVUX-2UAV is an extremely lightweight airborne laser scanner, designed specifically for integration with UAS/UAV/RPAS. The sister type of the proven *RIEGL* miniVUX-1UAV sensor offers 100 kHz and 200 kHz laser pulse repetition rate (PRR). With 200 kHz PRR, the sensor provides up to 200,000 measurements per second and thus a dense point pattern on the ground for UAV-based applications that require the acquisition of small objects.

The small and sophisticated design of the stable aluminum housing offers various integration possibilities with platforms that offer restricted space or payload capabilities. The 360° field of view allows complete acquisition of the environment.


An easy-to-remove SD card for data storage, and/or the option for streaming the scan data via LAN-TCP/IP interface, in combination with the modest power consumption of the scanner, enable straight-forward integration with most UAS/UAV/RPAS types.

The *RIEGL* miniVUX-2UAV makes use of *RIEGL*'s unique Waveform-LiDAR technology, allowing echo digitization and online waveform processing. Multi-target resolution is the basis for penetrating even dense foliage. As a further special feature, the wavelength is optimized for the measurement of snowy and icy terrain.

In addition to the stand-alone version of the miniVUX-2UAV, *RIEGL* also offers fully-integrated system solutions.

Typical applications include


- **Agriculture & Forestry**
- **Glacier and Snowfield Mapping**
- **Archeology and Cultural Heritage Documentation**
- **Construction-Site Monitoring**
- **Landslide Monitoring**

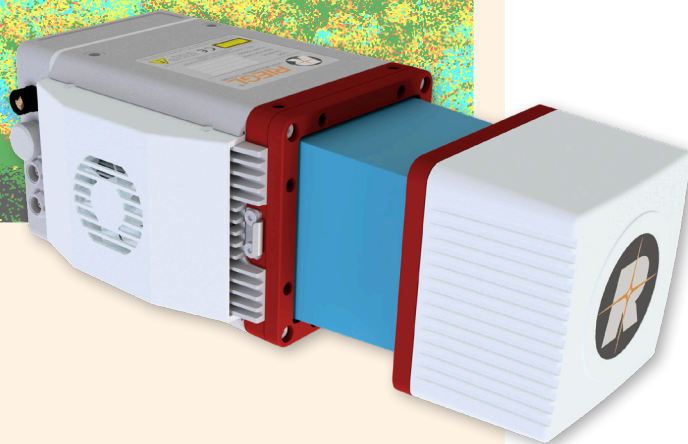


visit our website
www.riegl.com




Maximum Measurement Range vs. Target Reflectance *RIEGL miniVUX®-2UAV*

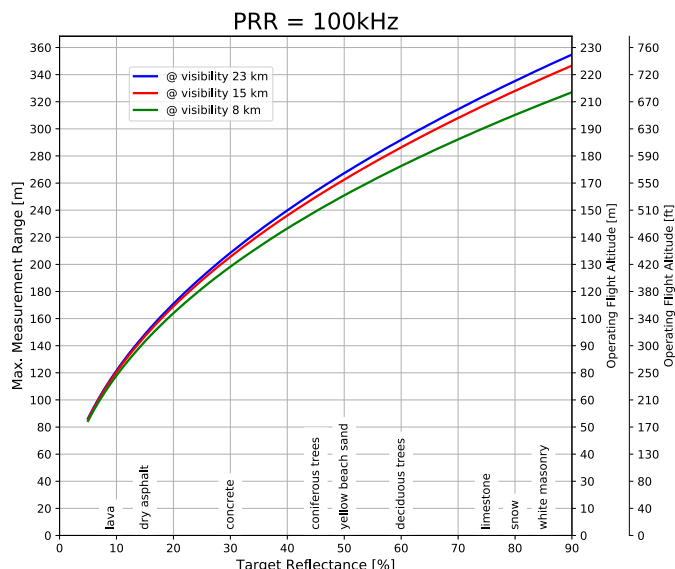


Operating Flight Altitude AGL given for the following conditions:
FOV of +/-45°, target size \geq laser footprint, average ambient brightness

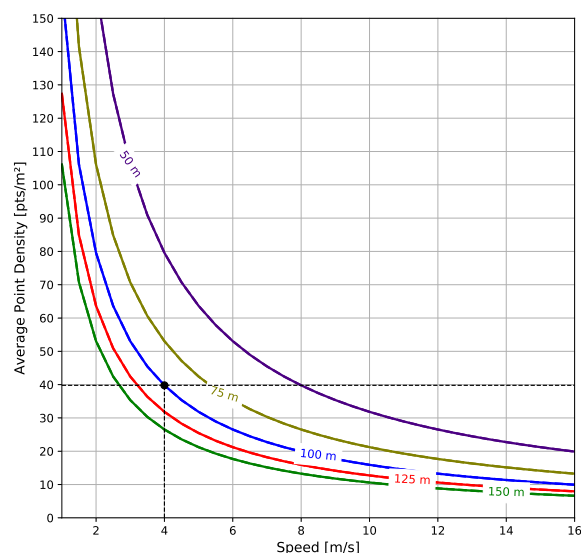

Example: miniVUX-2UAV at 100,000 pulses/second, speed = 4 m/s,
range to target = 100 m, resulting point density ~ 40 pts/m²

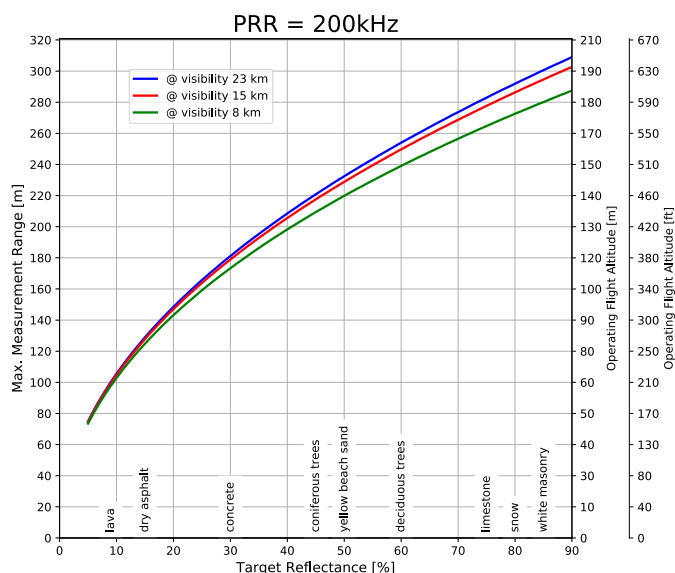

Operating Flight Altitude AGL given for the following conditions:
FOV of +/-45°, target size \geq laser footprint, average ambient brightness

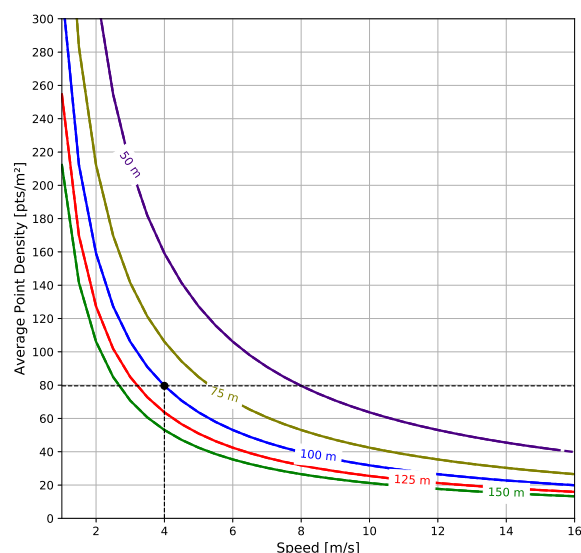

Example: miniVUX-2UAV at 200,000 pulses/second, speed = 4 m/s,
range to target = 100 m, resulting point density ~ 80 pts/m²

RIEGL miniVUX-SYS System Integration Options

Besides of the stand-alone miniVUX-2UAV LiDAR engine, *RIEGL* offers also system solutions, combining the miniVUX-2UAV with IMU/GNSS systems of different performance and of different form factors as well as optional RGB camera systems. Additionally, a special add-on to the miniVUX-SYS allows for straight forward integration with your multi-rotor UAV, e.g. a DJI Matrice M600 / M300 RTK.

RIEGL miniVUX-2UAV with APX-15 UAV¹⁾




- IMU/GNSS unit integrated with LiDAR engine
- total weight approx. 2 kg
- interfaces for up to 2 cameras
- suited for integration into fixed-wing UAVs

RIEGL miniVUX-2UAV with APX-20 UAV¹⁾



- higher-grade IMU/GNSS unit partly integrated with LiDAR engine
- total weight approx. 2.5 kg
- interfaces for up to 2 cameras
- suited for integration into all types of UAVs


RIEGL Integration Kit 600 / 300



- add-on to the miniVUX-SYS coming with shock-absorbing mounting-kit, power supply module and cabling
- total weight approx. 0.7 kg / 0.35 kg (without sensor and camera)
- suited for integration into multi-rotor UAVs

Please contact sales@riegl.com to get more detailed information.

¹⁾ See technical details in the corresponding Applanix datasheet

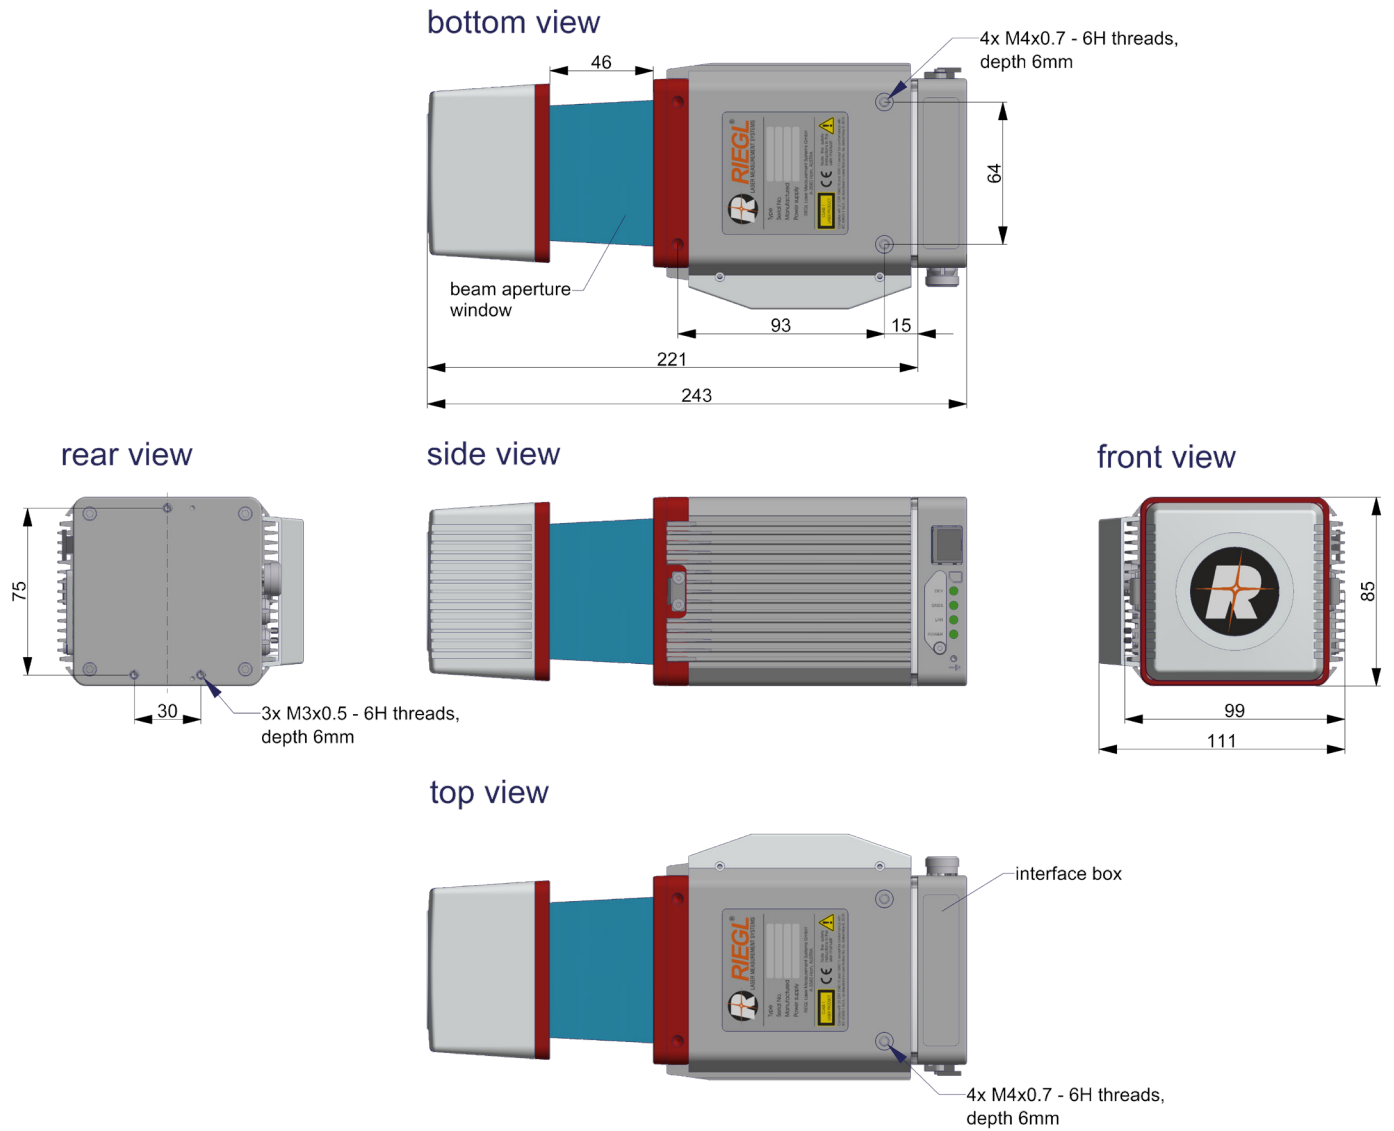

all dimensions in mm

RIEGL miniVUX®-2UAV Camera Options

RIEGL miniVUX-2UAV LiDAR Sensor equipped with APX-15 UAV¹⁾



with two Sony Alpha 6000 cameras (oblique mount)




with nadir-looking camera e.g. Sony Alpha 6000 camera or Sony A7R III or Sony A7R IV

integration of other 3rd party cameras possible²⁾

RIEGL miniVUX-2UAV LiDAR Sensor equipped with APX-20 UAV¹⁾



with two Sony Alpha 6000 cameras (oblique mount)



with nadir-looking camera e.g. Sony Alpha 6000 camera or Sony A7R III or Sony A7R IV

integration of other 3rd party cameras possible²⁾

1) See technical details in the corresponding Applanix data sheet.

2) Multispectral camera, hyperspectral camera, thermal imaging sensor – more information on request.

Technical Data *RIEGL* miniVUX®-2UAV

Laser Product Classification

Class 1 Laser Product according to IEC 60825-1:2014

The following clause applies for instruments delivered into the United States:
Complies with 21 CFR 1040.10 and 1040.11 except for conformance with
IEC 60825-1 Ed.3., as described in Laser Notice No. 56, dated May 8, 2019.

CLASS 1
LASER PRODUCT

Range Measurement Performance

Measuring Principle

time of flight measurement, echo signal digitization,
online waveform processing

Laser Pulse Repetition Rate PRR ¹⁾	100 kHz	200 kHz
Max. Measuring Range ²⁾		
natural targets $\rho \geq 20\%$	170 m	150 m
natural targets $\rho \geq 60\%$	290 m	250 m
natural targets $\rho \geq 80\%$	330 m	280 m
Typ. Operating Flight Altitude AGL ^{1) 3)}		
natural targets $\rho \geq 20\%$	100 m (330 ft)	85 m (280 ft)
natural targets $\rho \geq 60\%$	160 m (525 ft)	140 m (460 ft)
Max. Number of Targets per Pulse ⁴⁾	5	5

1) Rounded values.
2) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under overcast sky.
3) Flat terrain assumed, scan angle $\pm 45^\circ$ FOV
4) If more than one target is hit, the total laser transmitter power is split and, accordingly, the achievable range is reduced.

Minimum Range

Accuracy ^{5) 7)}

Precision ^{6) 7)}

Laser Pulse Repetition Rate ¹⁾

Max. Effective Measurement Rate ¹⁾

Echo Signal Intensity

Laser Wavelength

Laser Beam Divergence ⁸⁾

Laser Beam Footprint

2 m

15 mm

10 mm

100 kHz / 200 kHz (selectable)

up to 200 000 meas./sec. (@ 200 kHz PRR & 360° FOV)

for each echo signal, high-resolution 16 bit intensity information is provided
near infrared

1.6 x 0.5 mrad

160 mm x 50 mm @ 100 m

5) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

6) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

7) One sigma @ 50 m range under *RIEGL* test conditions.

8) Measured at 50% peak intensity, 1.6 mrad corresponds to an increase of 160 mm of beam diameter per 100 m distance.

Scanner Performance

Scanning Mechanism

Field of View (selectable)

Scan Speed (selectable)

Angular Step Width $\Delta \phi$ (selectable)

between consecutive laser shots

Angle Measurement Resolution

rotating mirror

up to 360°

10 - 100 revolutions per second, equivalent to 10 - 100 scans/sec

$0.018^\circ \leq \Delta \phi \leq 0.36^\circ$

0.001°

Interfaces

Configuration, Scan Data Output & Communication with External Devices GNSS Interface ⁹⁾

2 x LAN 10/100/1000 Mbit/sec

WLAN IEEE 802.11 a/b/g/n

Serial RS-232 interface for data string with GNSS-time information,
TTL input for 1PPS synchronization pulse.

General IO & Control ¹⁰⁾

Camera Interface

Memory Card Slot

2 x TTL input/output, 1 x Remote on/off

2 x GNSS RS-232 Tx & PPS, Power, Trigger, Exposure

for SDHC/SDXC memory card 32 GByte (can be upgraded to 64 GByte)

9) internally available (not available with standard interface box)

10) 1x externally available with standard interface box

General Technical Data

Power Supply Input Voltage / Consumption

Main Dimensions (L x W x H) / Weight

with Cooling Fan

without Cooling Fan

Humidity

Protection Class

Temperature Range ¹¹⁾

11 - 34 V DC / typ. 18 W @ 100 scans/sec

243 x 111 x 85 mm / approx. 1.6 kg


243 x 99 x 85 mm / approx. 1.55 kg

max. 80 % non condensing @ 31°C

IP64, dust and splash-proof

-10°C up to +40°C (operation) / -20°C up to +50°C (storage)

11) Continuous operation at ambient temperature of $\geq 30^\circ\text{C}$ ($\geq 86^\circ\text{F}$) requires a minimum amount of air flow at approx. 3 m/s. For applications where a 3 m/s air flow along the cooling fins cannot be guaranteed, the cooling fan has to be used.

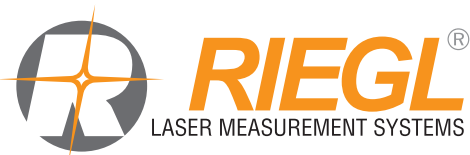

RIEGL Laser Measurement Systems GmbH
Horn, Austria
Phone: +43 2982 4211 | www.riegl.com
RIEGL USA Inc.
Winter Garden, Florida, USA
Phone: +1 407 248 9927 | www.rieglusa.com

RIEGL Japan Ltd. | www.riegl-japan.co.jp
RIEGL China Ltd. | www.riegl.cn
RIEGL Australia Pty Ltd. | www.riegl.com
RIEGL Canada Inc. | www.rieglcanada.com
RIEGL UK Ltd. | www.riegl.co.uk

www.riegl.com